



**Application**



The distribution box is suitable for mounting of modular electric installation devices with maximum current up to 63A. the product, available with neutral and earth terminal block, Din rail function label is widely used in low voltage distribution networks for power supplying of consumers and commercial buildings.

**Technical Data**

- Model:
  - Surface mounting type (S)
- Arc door classification:
  - Transparent (T)
  - Non-transparent (N)
- Door open direction: 90 degree upward
- Rated current:
  - 1 way to 4 modules maximum 50A
  - 6 way to 45 modules maximum 63A
- Materials: ABS of fire-resistant , PC, PP
- Protection degree: IP40
- Blank module: used to fill the empty, good for dust-proof and fix purpose.

**Overall & Installation Dimensions**

Model	Modules	Dimension		
		L(mm)	W(mm)	H(mm)
BDX2-4S	4 WAYS	112	210	95
BDX2-6S	6 WAYS	148	210	95
BDX2-8S	8 WAYS	184	210	95
BDX2-12S	12 WAYS	256	210	95
BDX2-18S	18 WAYS	364	222	95
BDX2-24S	24 WAYS	270	325	100
BDX2-36S	36 WAYS	305	473	100

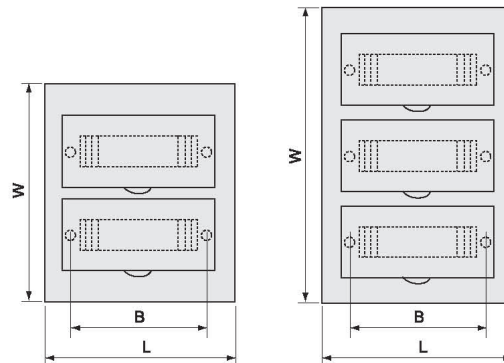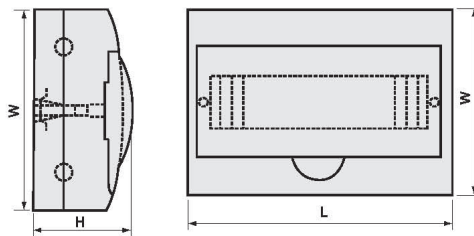

Distribution Box